


Compact Fluorescent Lamp

- 120 V 60Hz
- High or Mid Power Factor Design
- Color Temp: 2700K or 4100K or 6500K
- CRI - 80 min
- Medium Base
- Min. Starting Temp: - 20°F
- UL Listed
- FCC Approved
- US Dept. of Energy Approved

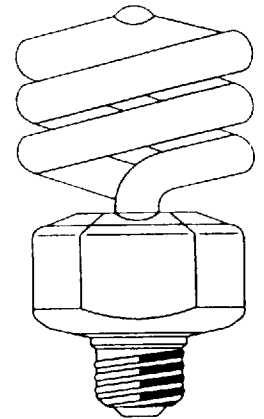

Type - Spiral (High & Mid Power Factor)

LAMP ORDER CODE	WATTAGE	POWER FACTOR	APPROX. LUMENS OUTPUT	MAX. OVERALL LENGTH (inch)	MAX. OVERALL WIDTH (inch)	SINGLE PACK DIMENSIONS		
						W (inch)	D (inch)	H (inch)
SP 15S	15	> 0.95	900	5.25	2.30	2.65	2.65	5.80
SP 20S	20	> 0.95	1200	5.10	2.36	2.65	2.65	5.80
SP 23S	23	> 0.95	1380	5.74	2.36	2.65	2.65	6.25
SP 15SL	15	> 0.50	900	5.25	2.30	2.65	2.65	5.80
SP 20SL	20	> 0.50	1200	5.10	2.36	2.65	2.65	5.80
SP 23SL	23	> 0.50	1380	5.74	2.36	2.65	2.65	6.25
SP 26S	26	> 0.90	1560	6.000	2.62	2.75	2.75	6.50
SP 30S	30	> 0.90	1800	6.75	2.62	2.75	2.75	7.00

Rated life for all lamps is up to 10,000 hrs

Type - Mini Spiral (Mid Power Factor)

LAMP ORDER CODE	WATTAGE	POWER FACTOR	APPROX. LUMENS OUTPUT	MAX. OVERALL LENGTH (inch)	MAX. OVERALL WIDTH (inch)	SINGLE PACK DIMENSIONS		
						W (inch)	D (inch)	H (inch)
SP 7SL	7	>0.50	400	4.37	1.65	2.00	2.00	6.00
SP 9SL	9	>0.50	500	4.60	1.65	2.00	2.00	6.00
SP 11SL	11	>0.50	600	4.75	1.65	2.00	2.00	6.00

Rated life for all lamps is up to 10,000 hrs

Type - Dimming Spiral* (High Power Factor)

LAMP ORDER CODE	WATTAGE	POWER FACTOR	APPROX. LUMENS OUTPUT	MAX. OVERALL LENGTH (inch)	MAX. OVERALL WIDTH (inch)	SINGLE PACK DIMENSIONS		
						W (inch)	D (inch)	H (inch)
SP 20SD	20	> 0.90	1200	5.70	2.36	2.65	2.65	6.25

Rated life for all lamps is up to 10,000 hrs

- Use with Standard Wall Dimmers, Photo-sensors, or Timers.