


**POURED-IN-PLACE RUBBER SURFACING
AGGREGATE BASE & J-CURB**


4" Crushed Aggregate
(Depth may vary to accommodate change in grade.)

Top layer of the sub-base needs to be compacted
at 95% Dry Density.

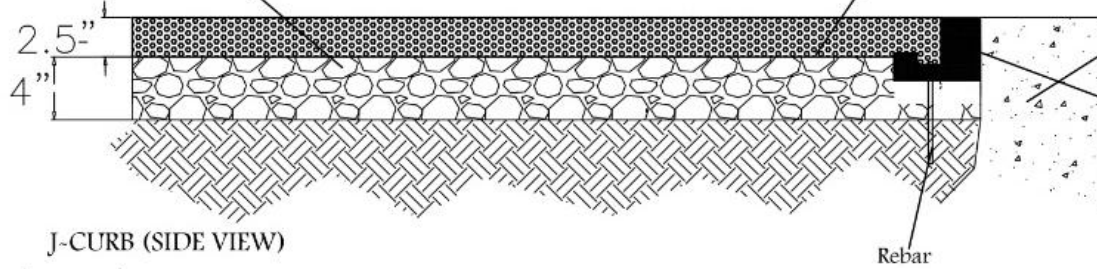


Will be used to hold the aggregate in place and
to hold the poured rubber to the curb to prevent
shifting of the rubber surfacing and base.

J-CURB (SIDE VIEW)

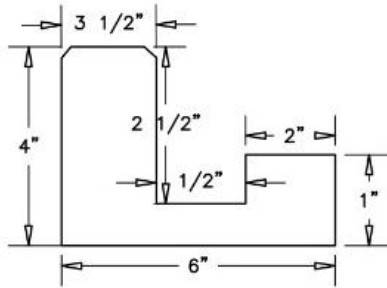

J-CURB (TOP VIEW)

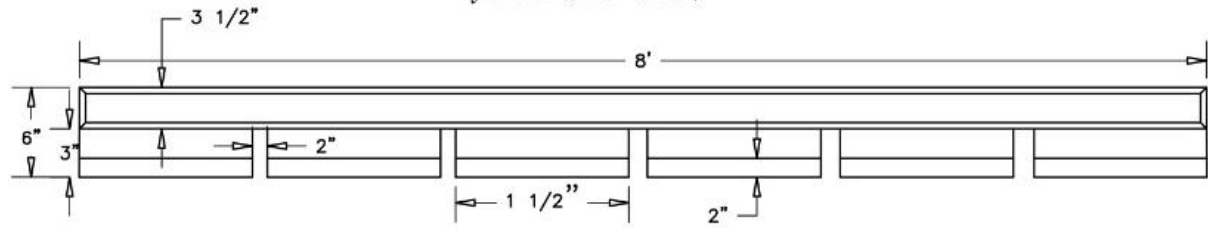

2 1/2" BLACK CHUNK RUBBER

J-CURB



3D J-CURB DESIGN

