



Secure-Lock™ Structural Insulated Panel - SIP

- Internal Snap-Lock fastening feature.
- Snaps together in header.
- No rocking of panels required.
- Metal is chemically bonded to foam.
- Continuous Insulation.
- Quick and easy to install.
- Foam thicknesses from 2" to 8".
- Panels come in 48" or 23-1/8" widths.
- Eliminates condensation problems.
- Skylights and fans installed with ease.

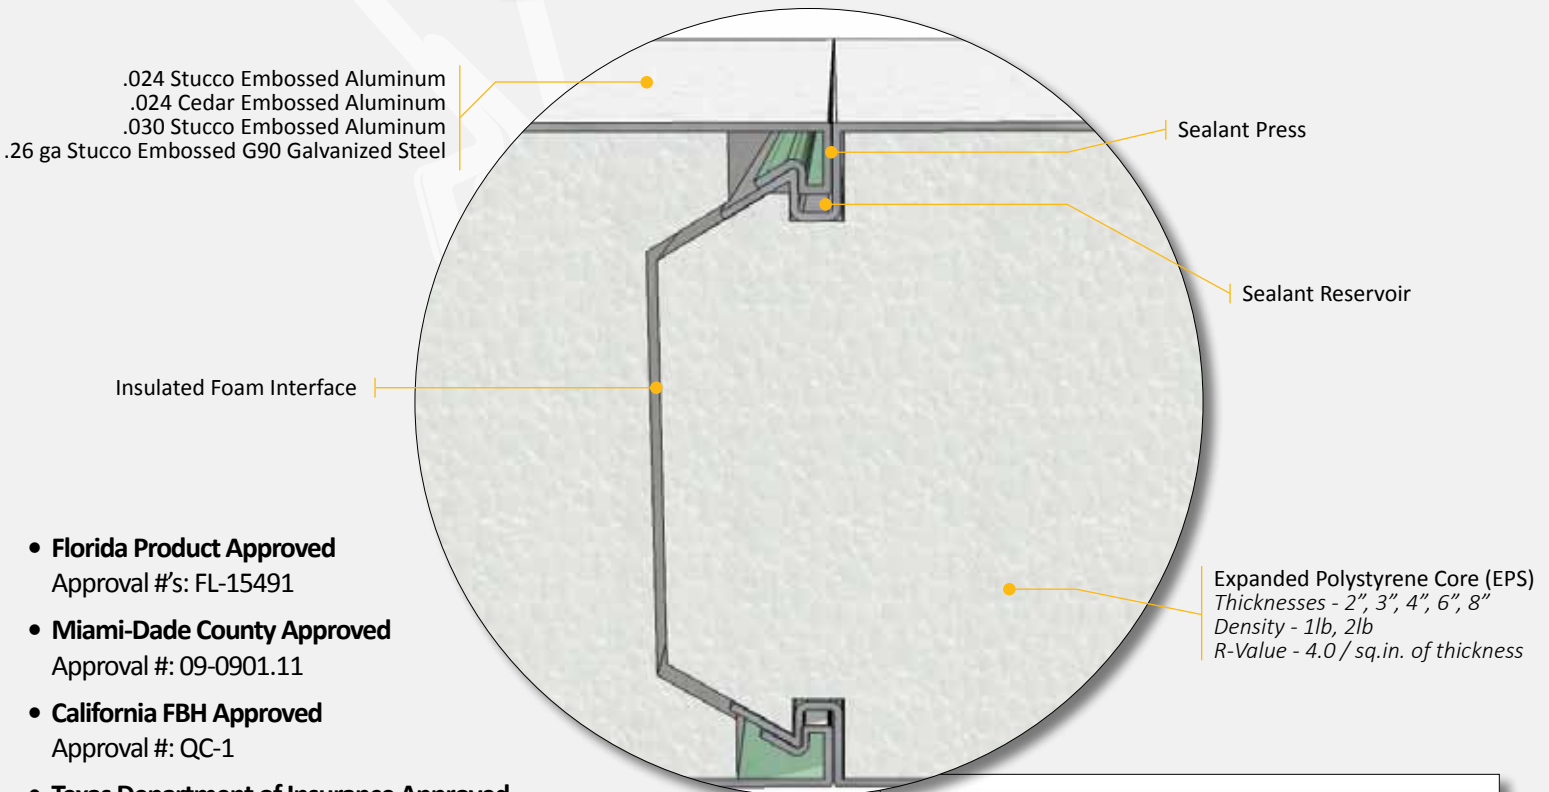

- **Florida Product Approved**
Approval #'s: FL-15491
- **Miami-Dade County Approved**
Approval #: 09-0901.11
- **California FBH Approved**
Approval #: QC-1
- **Texas Department of Insurance Approved**
Approval #: RC-247
- **International Code Council - ICC**
The Snap-N-Lock™ Panel is recognized by ICC-ES
ESR- 2488 and # ESR-3152
- **ENERGY STAR® Certified**
.024 & .030 Aluminum Snap-N-Lock™ Composite Roof Panels with White Tuff-Kote Gold Dual Layer Paint Finish meet or exceed the requirements set forth by ENERGY STAR®.
- **Aluminum Association of Florida**
The Florida Building Commission has formally adopted the AAF Guide Book into the Florida Building Code.

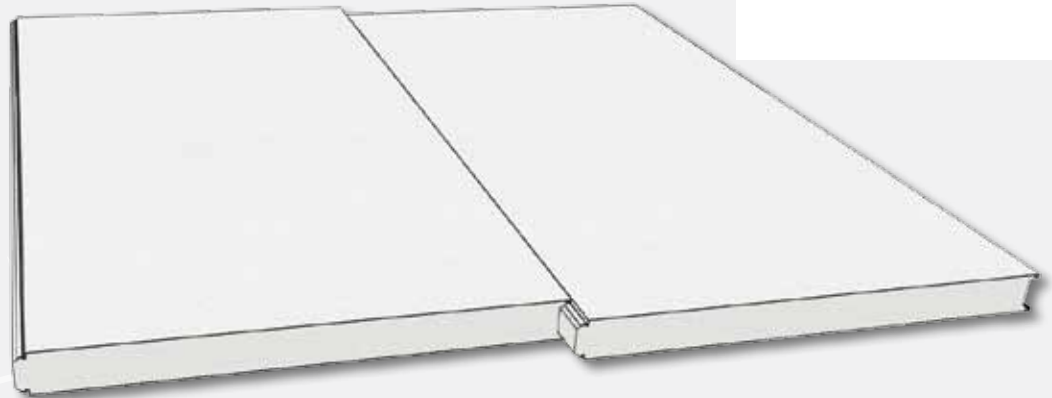

Fan Beam

- Cont. 1.5" x 3" x .050" Alum. Fan Beam Extrusion.
- Fasten fan or light using self-tapping screws.
- Surrounded on all sides by foam for better lamination as well as to reduce telegraphing and condensation within fan beam.

