


6" LED down light

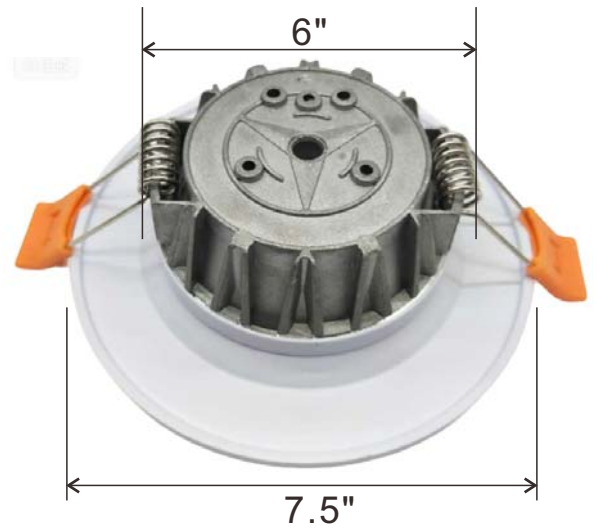

Product Features

- Aluminum design.
- Special light design, High lumen efficiency.
- Universal AC input 100-277Vac.
- Protections: Short circuit / Over current/ Over temperature.
- Wide color availability in degrees Kelvin(K),2700-6700K or Amber color.

Applications

- Commercial lighting / indoor lighting.
- Office, house etc.
- Other applications.



Rated Power	18W
Input Voltage	100-277VAC / 50-60Hz
Input Current	0.18A / 115VAC ; 0.09A / 230VAC ; 0.06A / 277VAC
Power Factor	PF>0.98 / 115VAC ; PF>0.95 / 230VAC ; PF>0.92 / 277VAC
Power Efficiency	>93%
Beam Angle	120°
Light Source/Count	SMD LED
Lamp Base	wires
LED Luminous Efficiency	White >120lm/w, Amber > 70lm/w
Luminous Flux	2160 lm ±10%, 1260 lm ±10%
Color Temperature Standard	White: 2,700 ~ 6,500 K Amber 585nm
Color Rendering Index(CRI)	Ra > 85
LED Emitter Life	50,000hours
Replacement	40-60w CFL
Working Environment	indoor lighting
Operating Temperature	-40 ~ 45°C