Datasheet of 180° LED 2G11


(9W/15W/18W/22W)

Qualification




Features

- The led 2G11 tube can replace both Osram and Philip Dulux compact
 Fluorescent tube
- High lumen Epistar 2835 SMD.
- Aluminum housing and PCB is good for heat dissipation.
- Isolated driver, constant current, Rubycon capacitor making lamp work stably, no flicking.
- UL/cUL, CE, RoHS certificates
- 3 years warranty






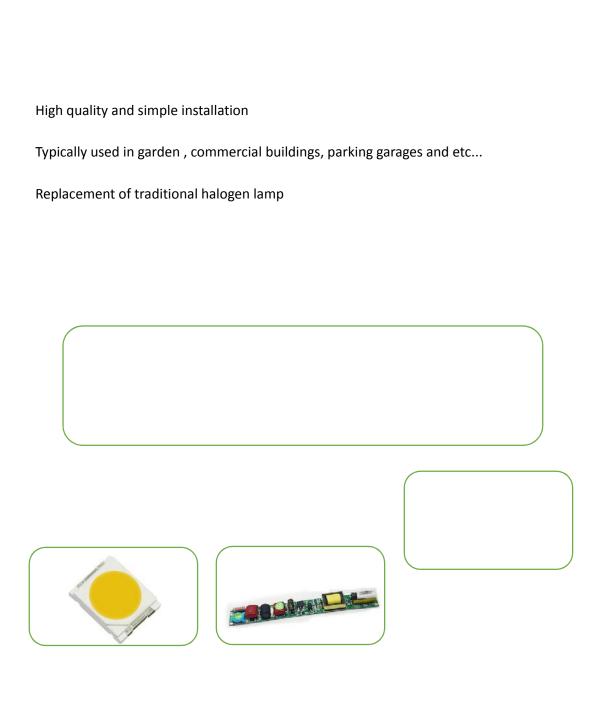


Specification

| | ECO-2G11-9W | ECO-2G11-15W | ECO-2G11-18W | ECO-2G11-22W |
|------------------------|------------------|--------------|--------------|--------------|
| Input Voltage | AC100-277V | | | |
| LED light source | Epistar 2835 SMD | | | |
| LED Qty | 48pcs | 76pcs | 96pcs | 148pcs |
| Rated Power | 9W | 15W | 18W | 22W |
| Luminous Flux | 850LM | 1350LM | 1650LM | 2200LM |
| Dimension | 225*38*28mm | 320*38*28mm | 410*38*28mm | 535*38*28mm |
| Net weight | 180g | 240g | 240g | 330g |
| Base | 2G11/GY10/G23 | | | |
| Lampshade | Clear/Milky | | | |
| Color Temperature | 2700-6500К | | | |
| CRI | Ra>83 | | | |
| Power Factor | >0.95 | | | |
| Working Temperature | -20~+40°C | | | |
| Beam Angle | 180° | | | |
| Lifespan | 50.000hrs | | | |

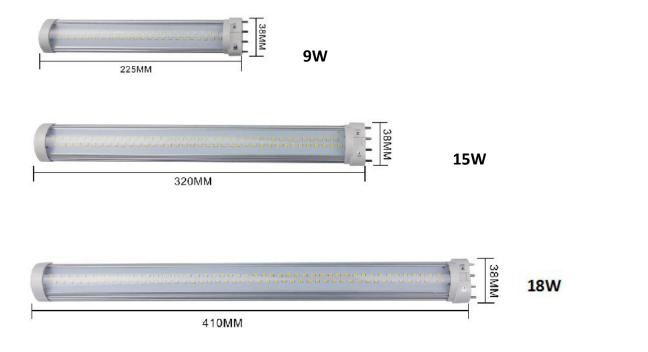



Production process

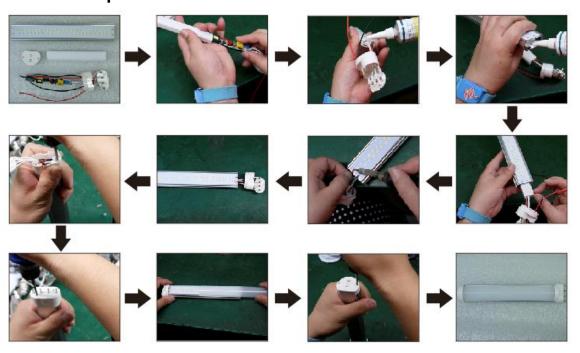


Aging



Installation Notes

(1) If magnetic ballast

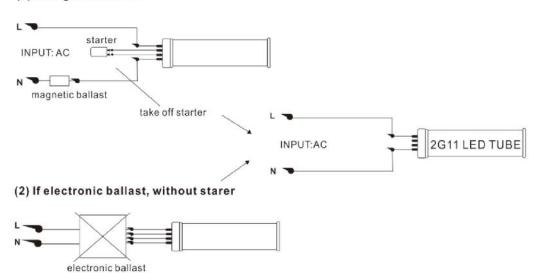

remove electronic ballast

Replace

| Wattage | CFL |
|---------|-----|
| 9W | 18W |
| 15W | 23W |
| 18W | 40W |
| 22W | 55W |

Applications

It can be used in Residential Buildings, Home,Office, Meeting Room ,School, Library,Factory, Warehouse,Hotel, Casino,Parking Garage,Hospital,Commercial Center,Supermarket,Shopping mall,anywhere you want.











