

LED Pathway Light 15W





Product Features

- Beam angle: 180 degrees.
- Special light design, High lumen efficiency.
- 100-277Vac input or 12Vdc input.
- Protections: Short circuit / Over current/ Over temperature.
- Wide colour availability in degrees Kelvin(K).

Applications

- Garden lighting.
- Bridge or public park.
- Turtle Lighting

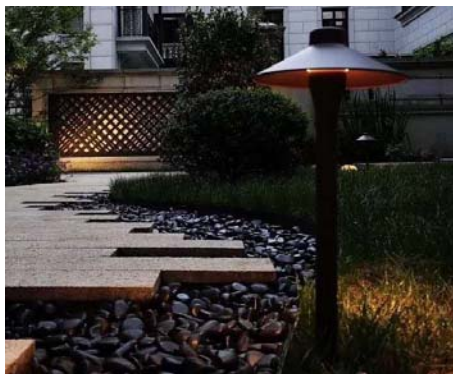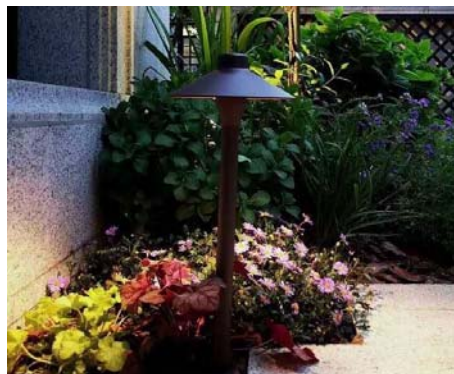

Rated Power	15W
Input Voltage	100-277VAC / 50-60Hz or 12Vdc
Input Current	0.15A / 115VAC ; 0.8A / 230VAC ; 0.07A / 277VAC
Power Factor	PF>0.99 / 115VAC ; PF>0.95 / 230VAC ; PF>0.92 / 277VAC
Power Efficiency	>90%
Beam Angle	180°
Light Source/Count	SMD Led
Lamp Base	wires
LED Luminous Efficiency	>100lm/w
Luminous Flux	1500 lm ±10%
Color Temperature Standard	White: 2,700 ~ 6,500 K
	Blue, Green , Red , Yellow , Amber (585 NM Turtle)
Color Rendering Index(CRI)	Ra > 70
LED Emitter Life	50,000hours
Replacement	60W-90W Metal Halide/HPS
Working Environment	outdoor lighting
Dimension	D170mm * H450mm